



Fig.2

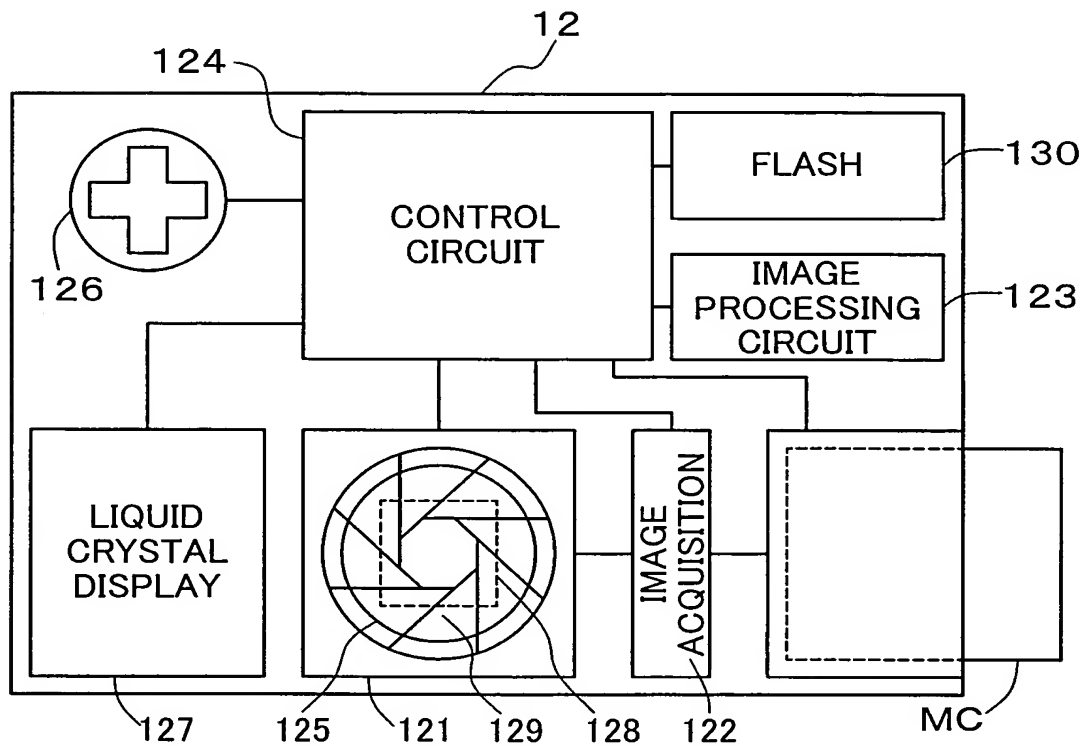


Fig.3


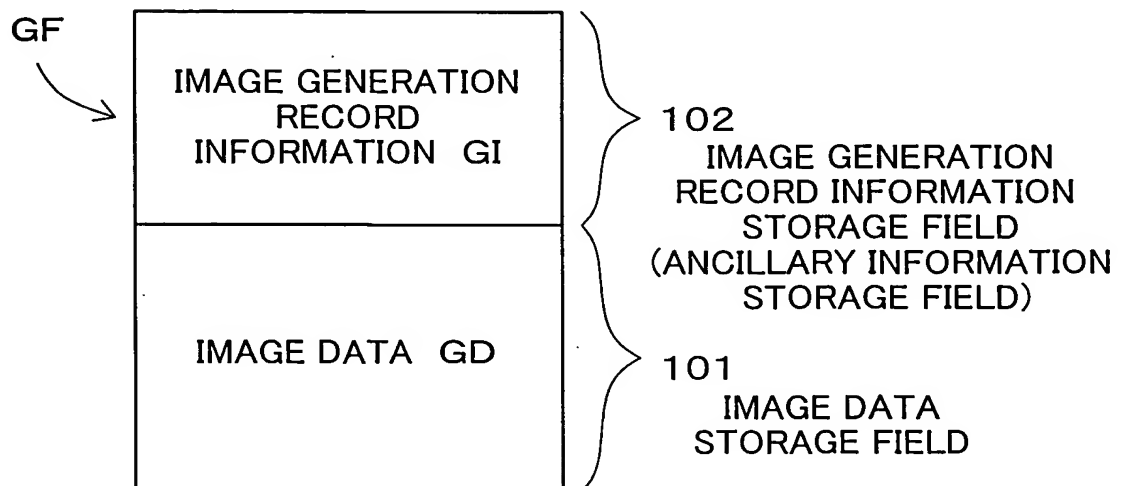




Fig.4

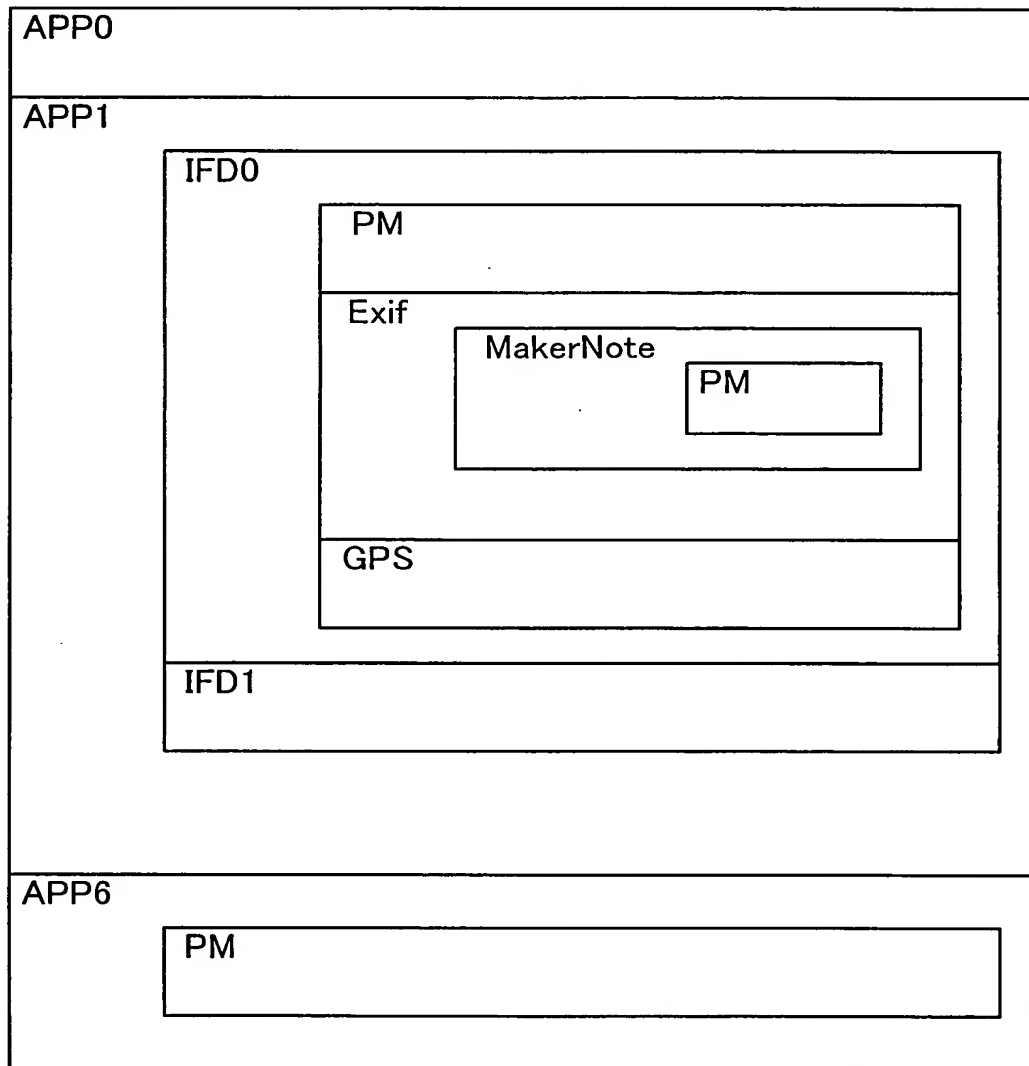

•
•
•






Fig.5

Tag name	Parameter value
Flash	<ul style="list-style-type: none">▪ auto flash mode▪ flash on▪ reflected light sensor present▪ reflected light sensed
Subject distance	1 (m)
Flash intensity	1000(BCPS)
Aperture value	F8
ISO speed rating	100





Fig.6

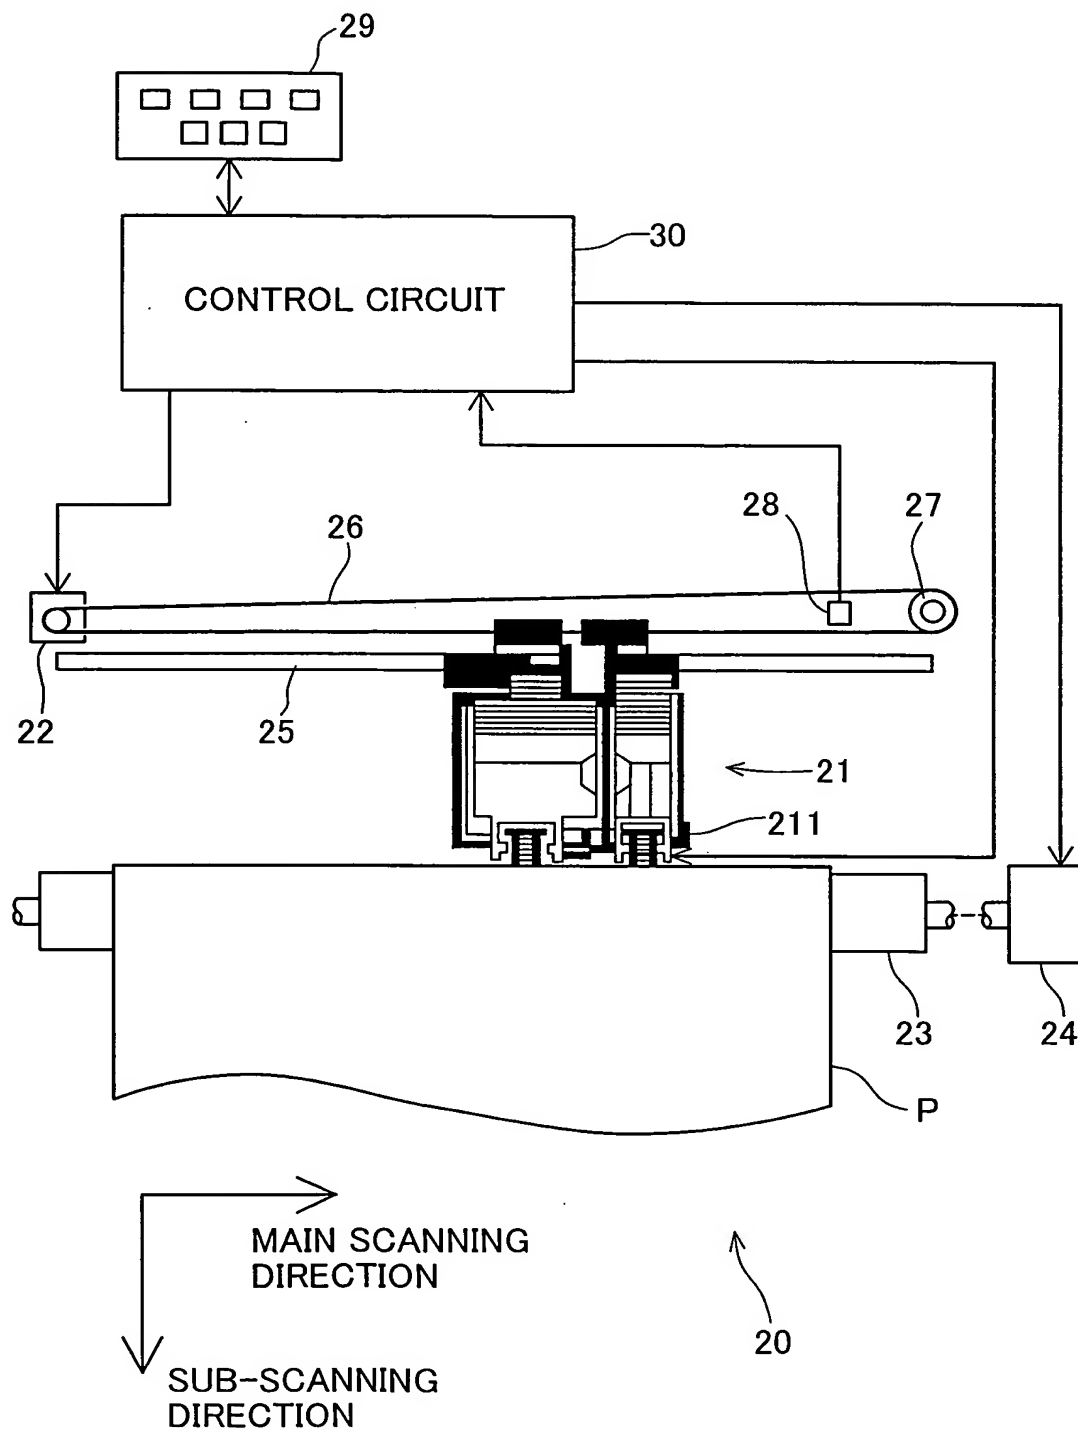




Fig.7

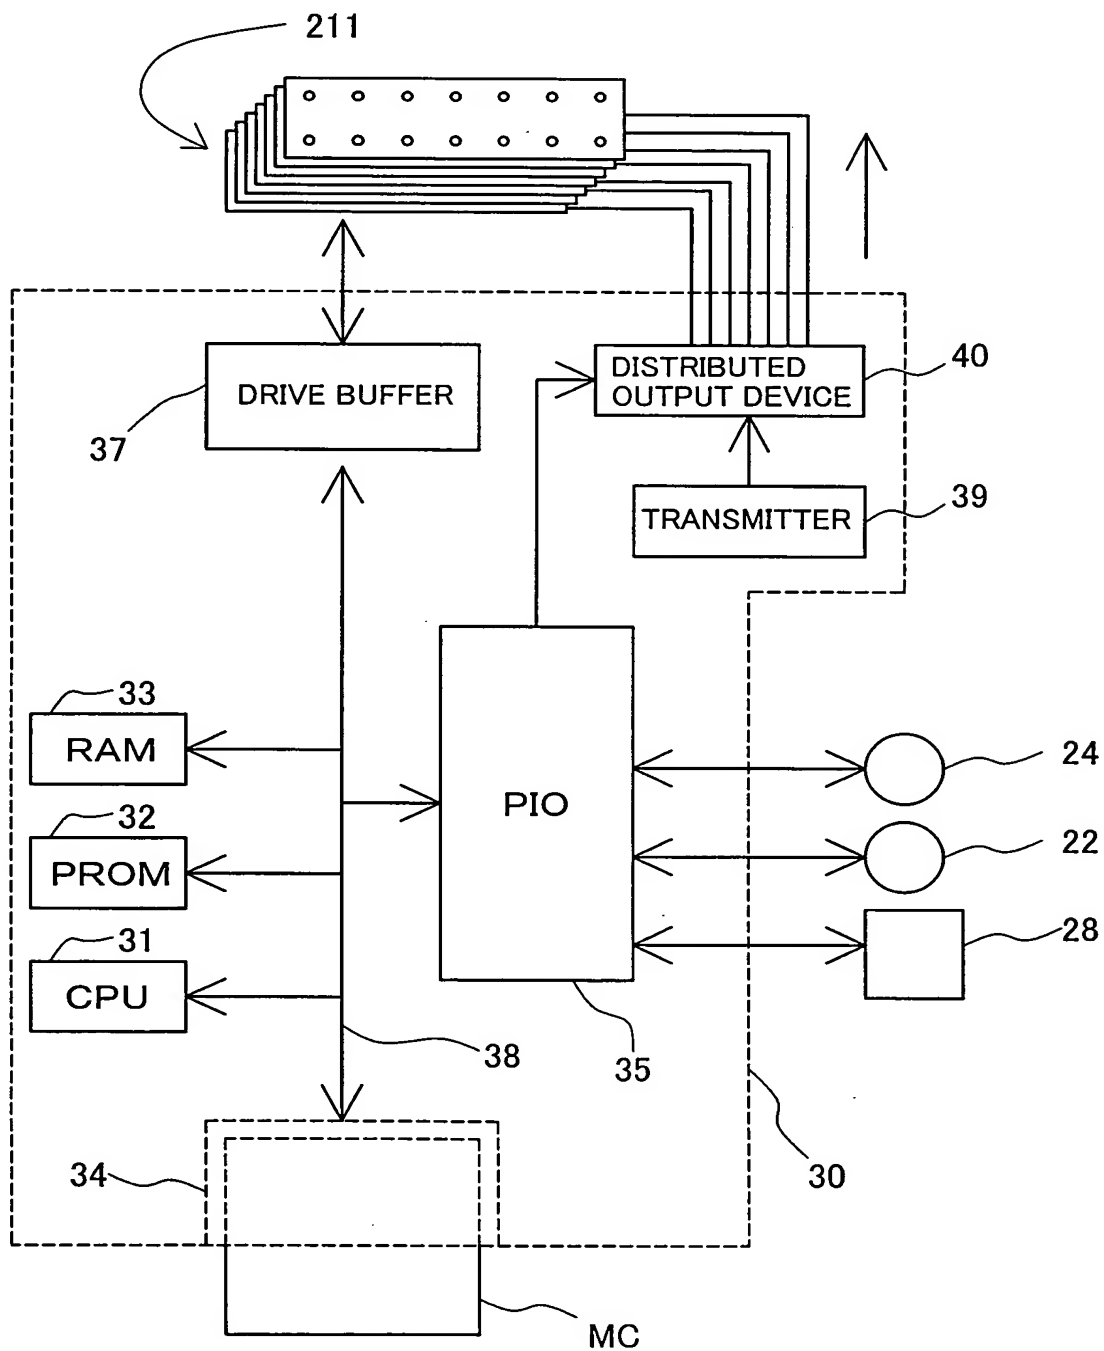




Fig.8

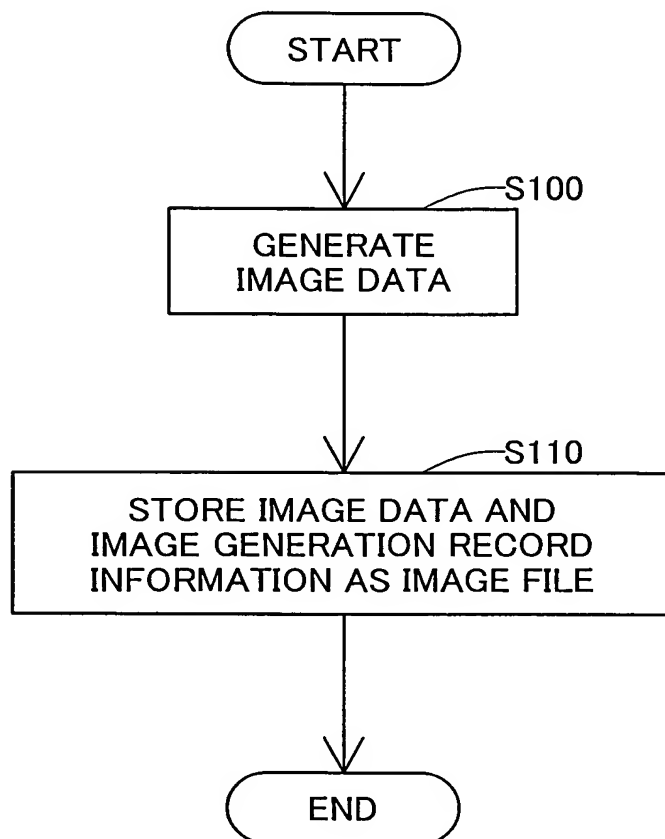




Fig.9

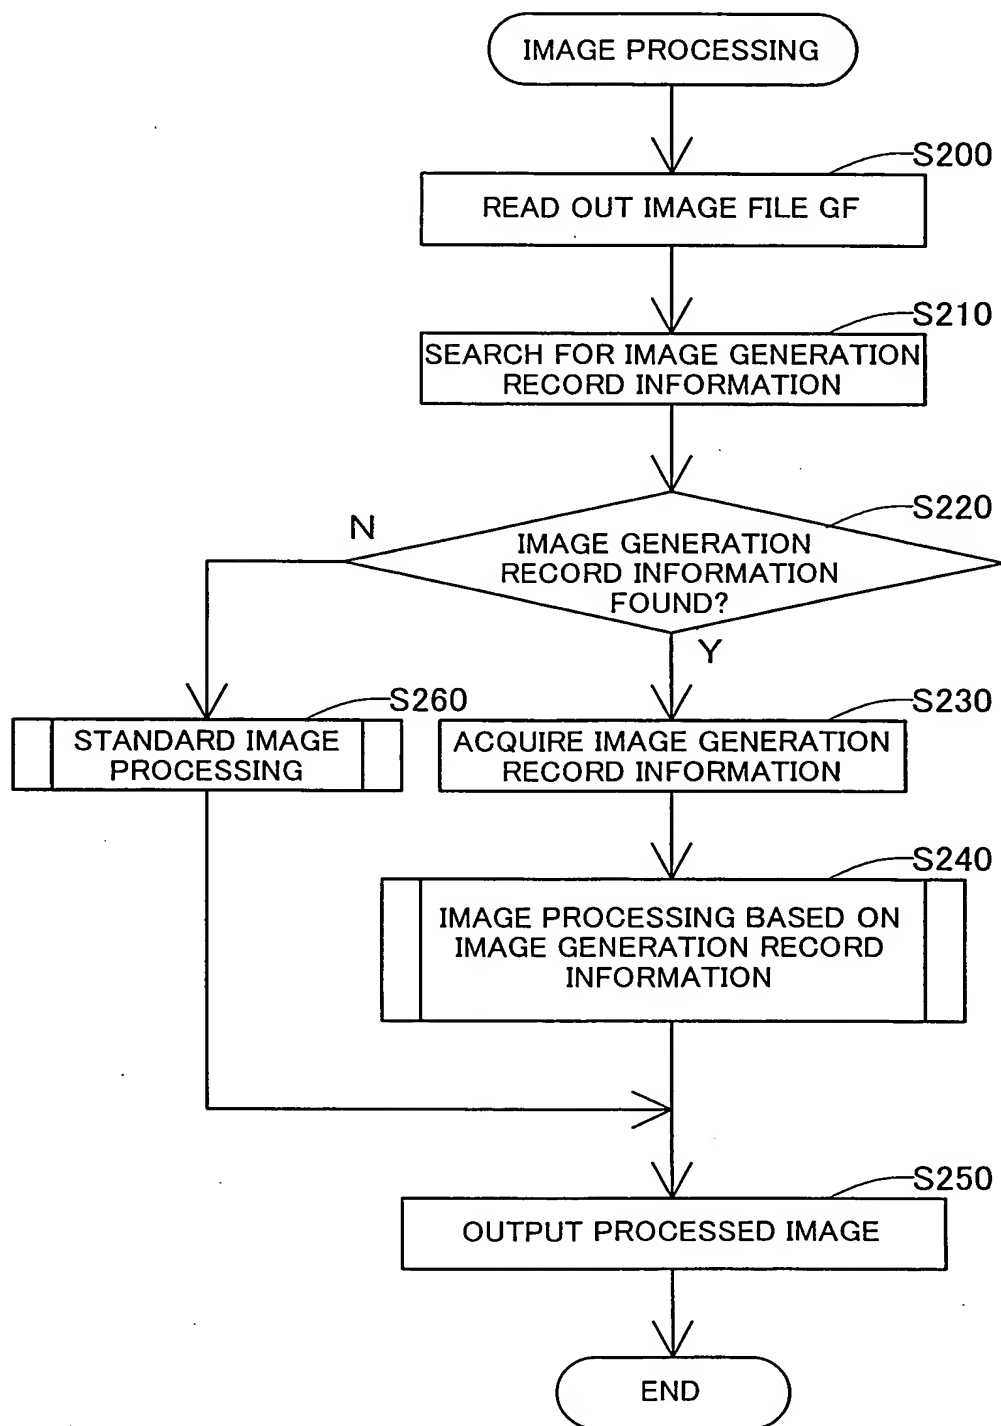




Fig.10

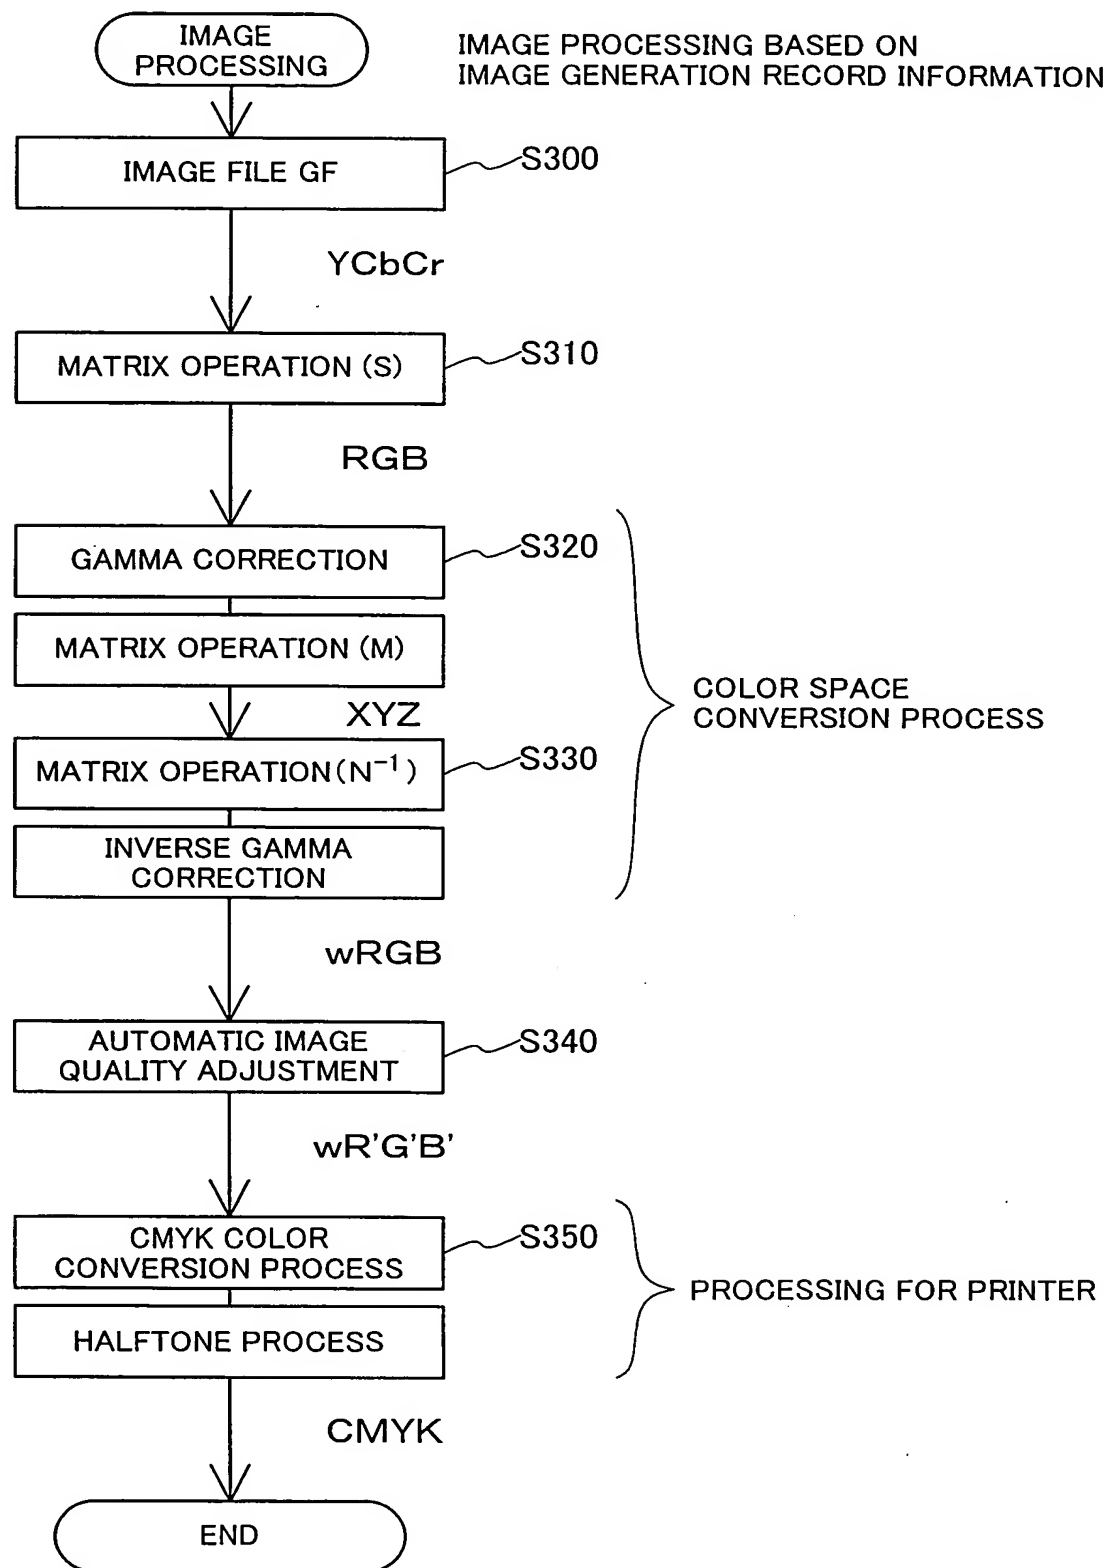
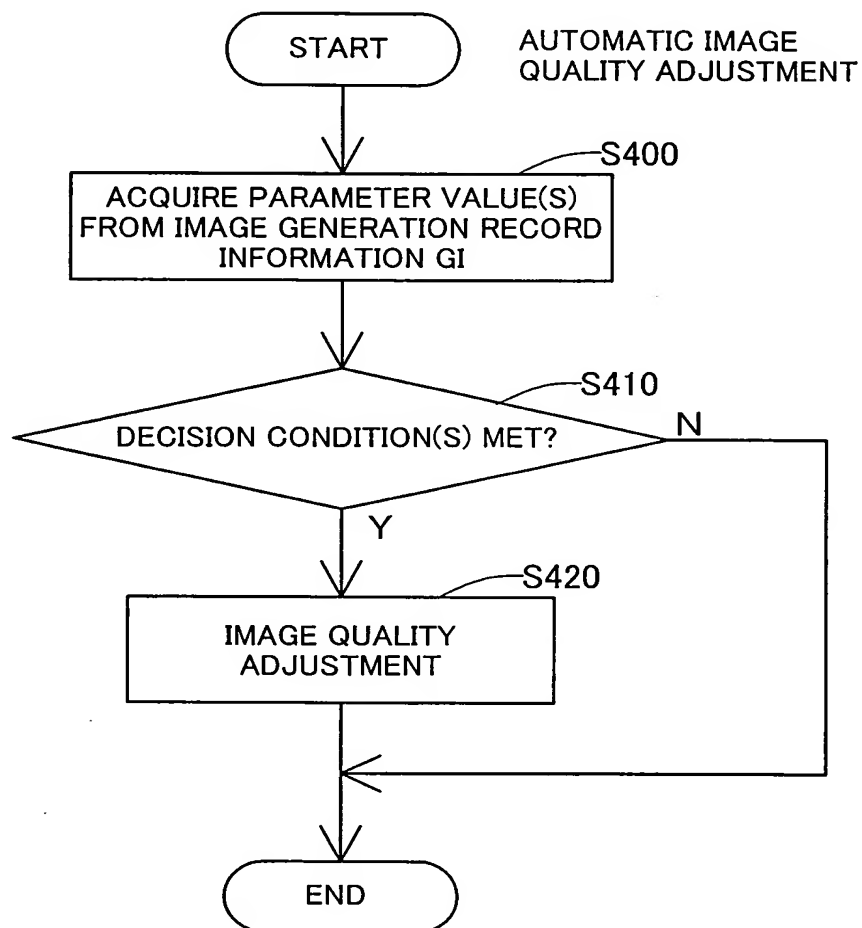




Fig.11




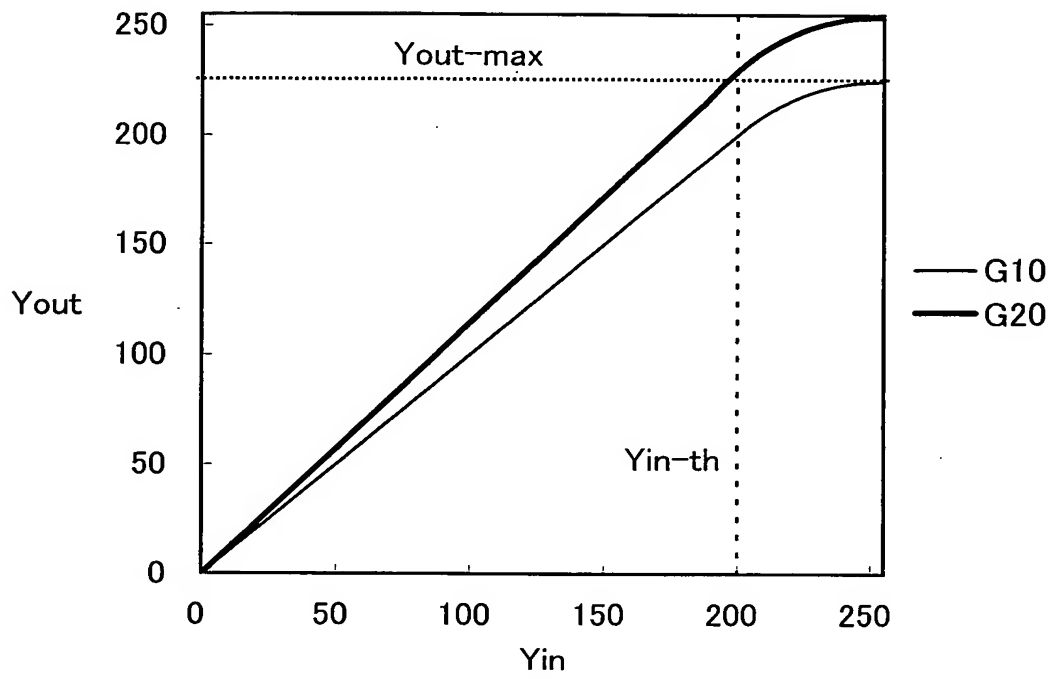


Fig.12






Fig.13

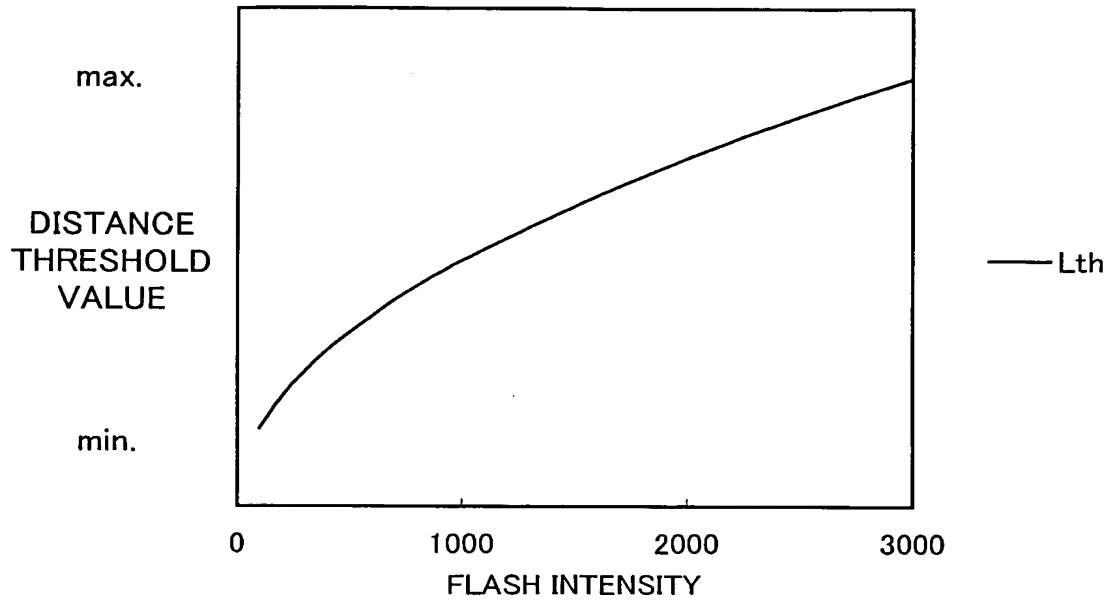
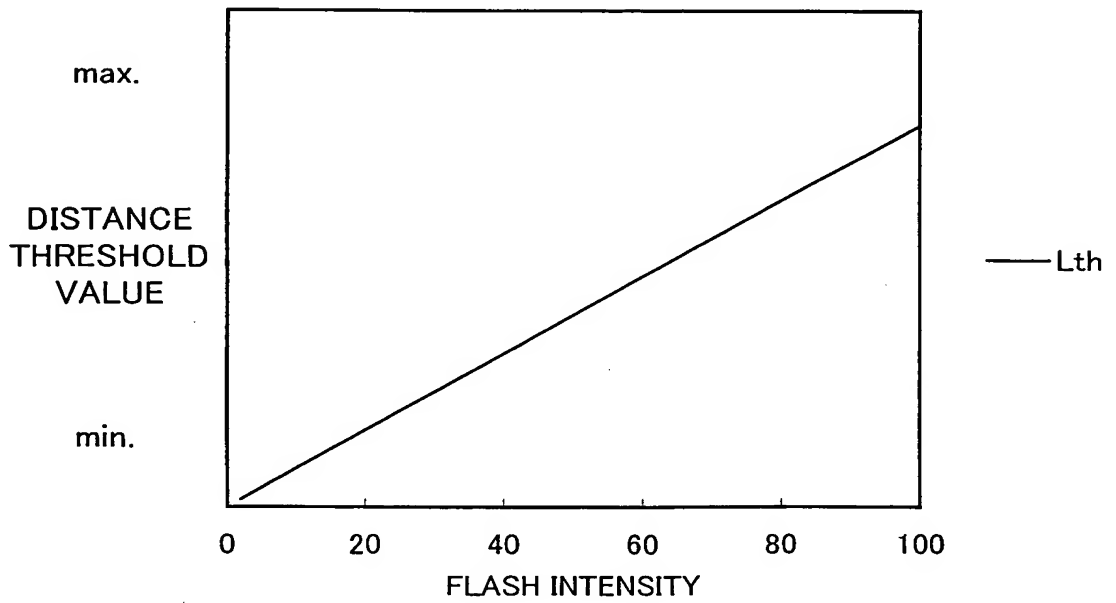


Fig.14






Fig.15

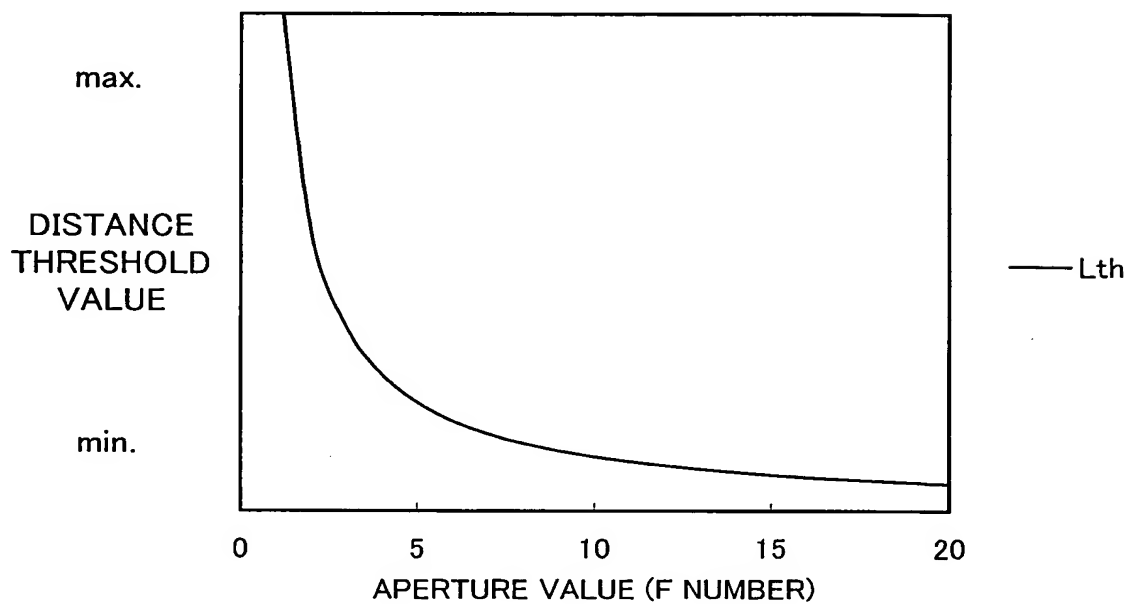


Fig.16

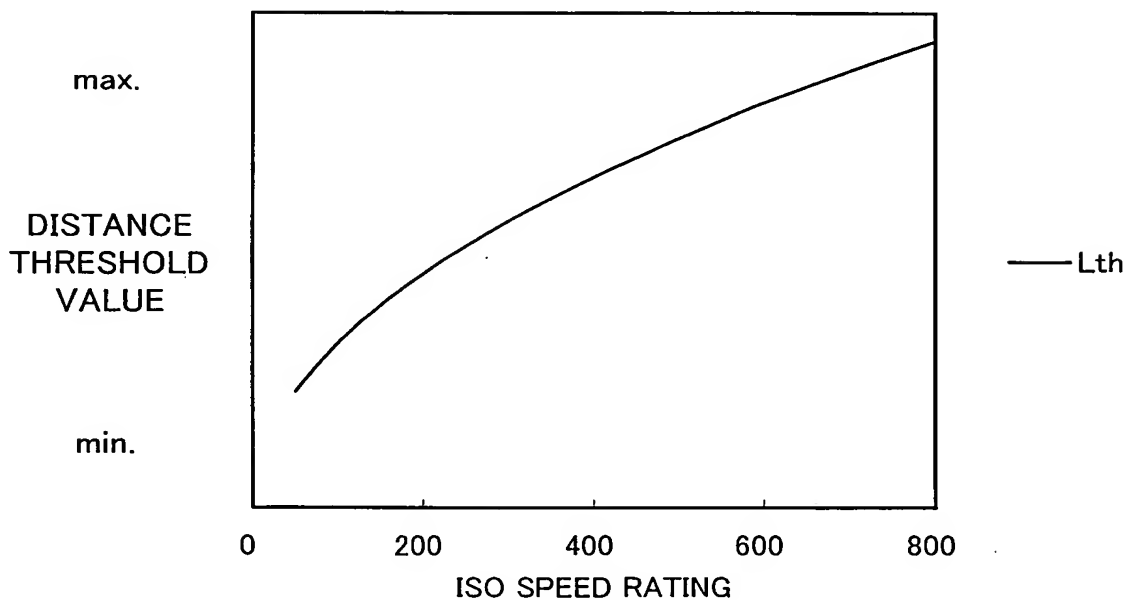




Fig.17

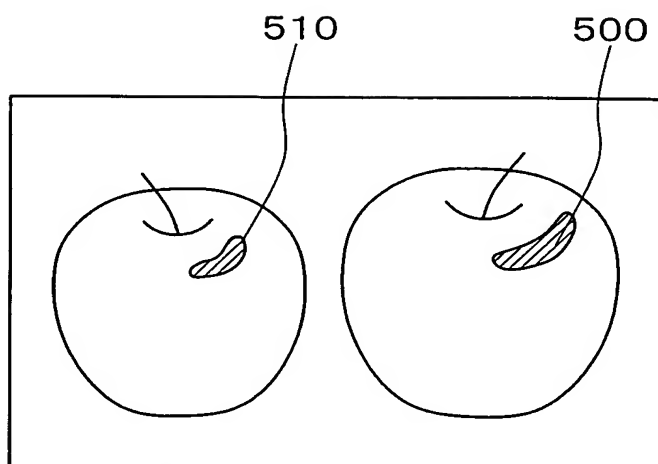


Fig.18

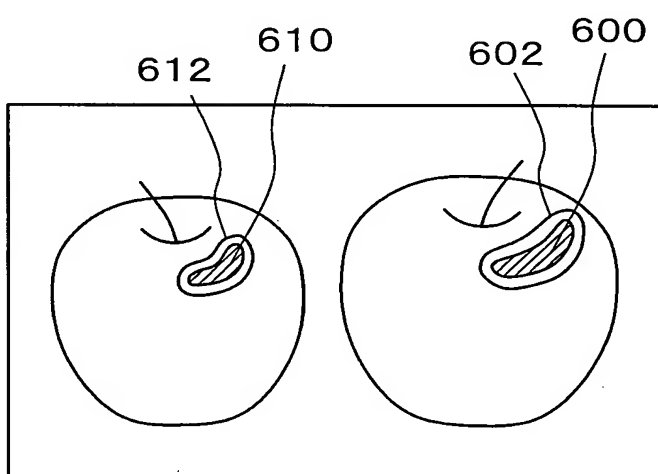




Fig.19

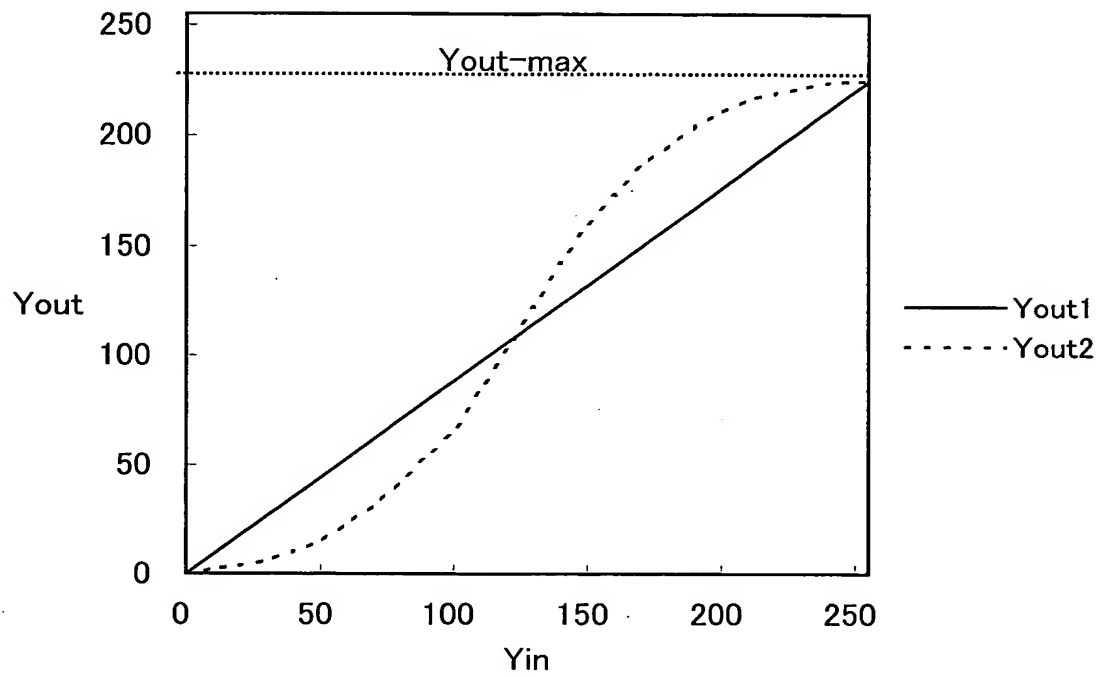
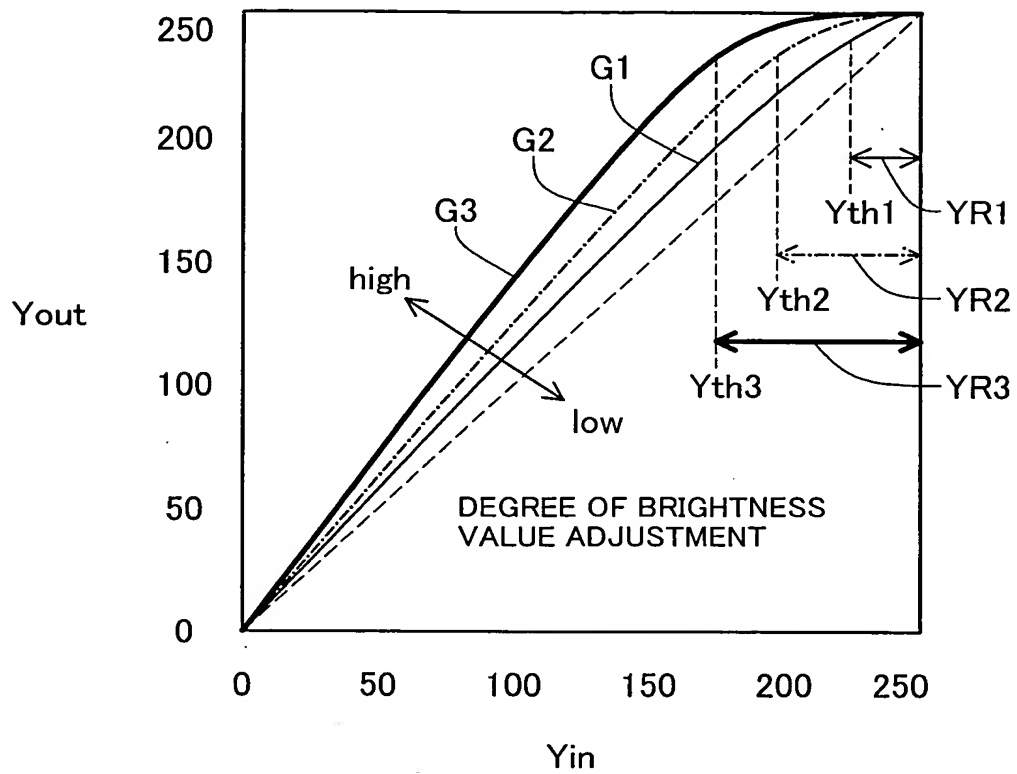




Fig.20



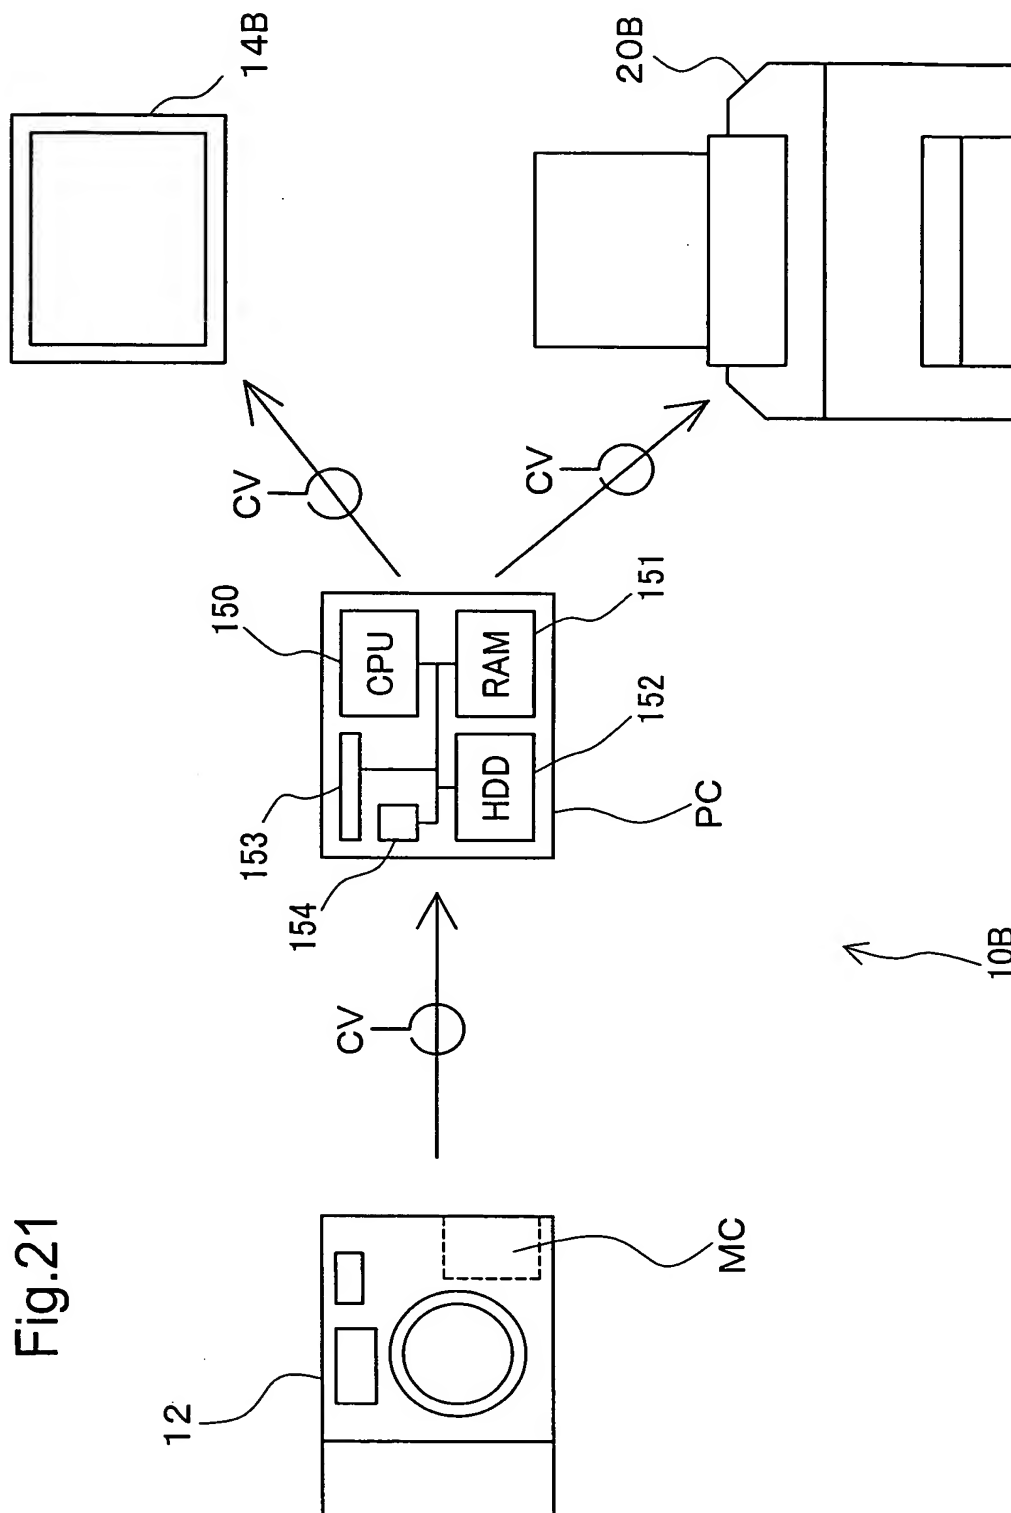
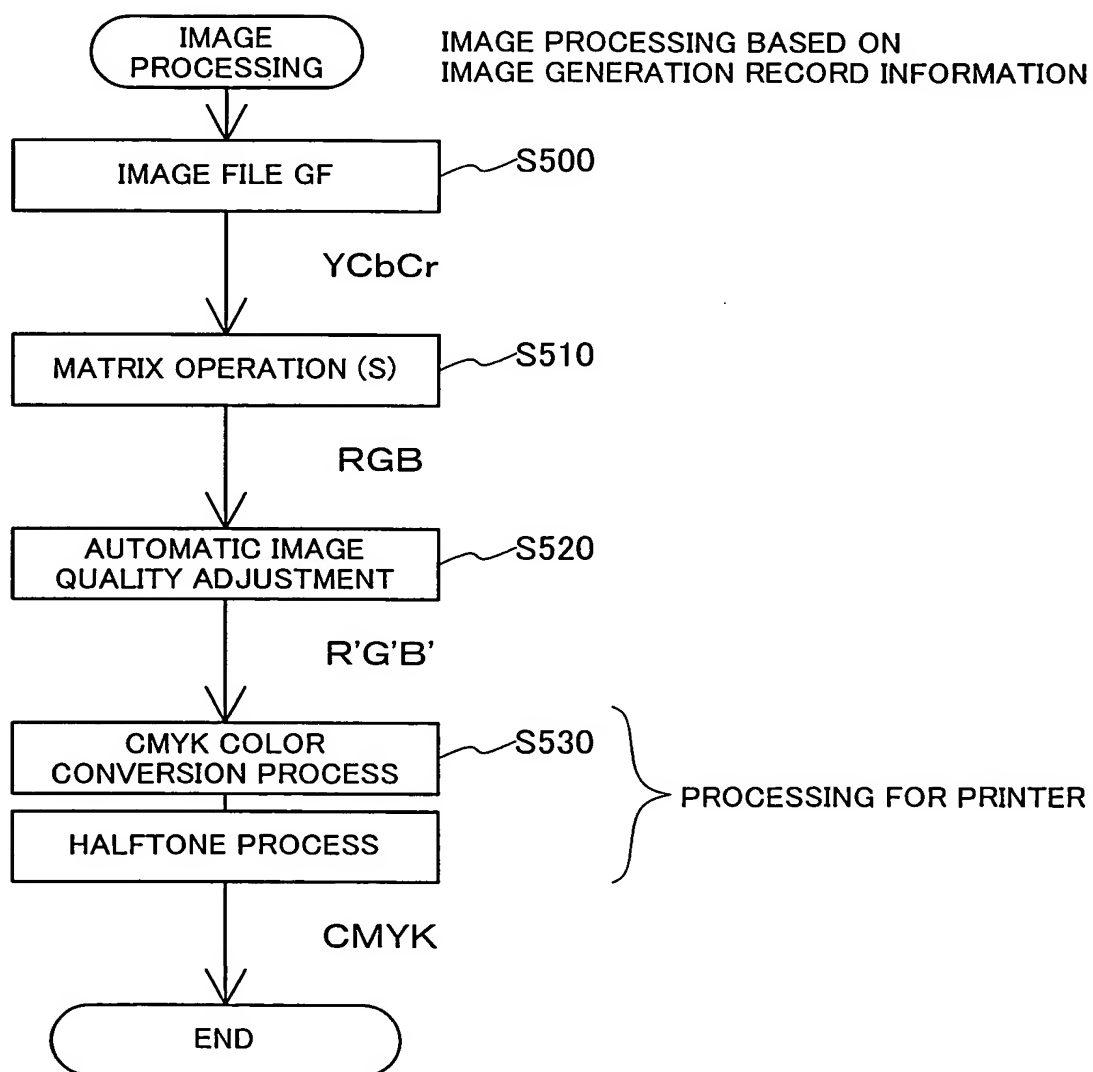


Fig.21



Fig.22






Fig.23

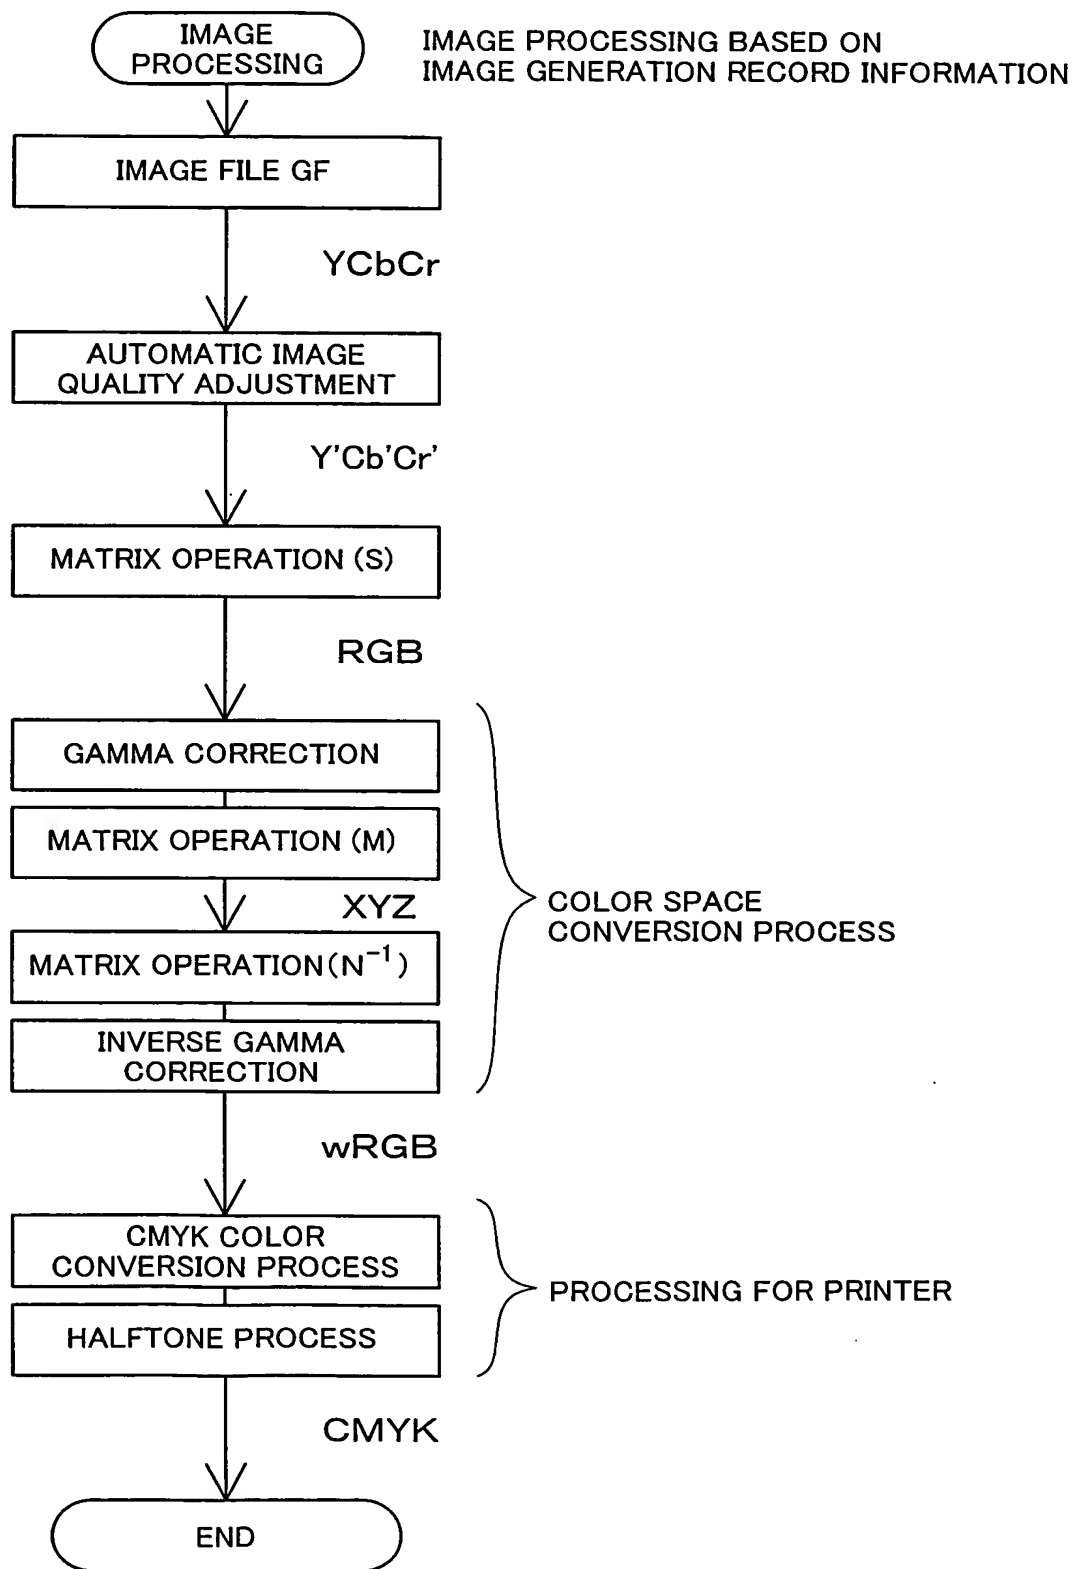




Fig.24

IMAGE PROCESSING BASED ON
IMAGE GENERATION RECORD INFORMATION

